

# LED PENDANTS

## BELLA

## LAVEER

# PENDANT AT A GLANCE...

Canopy & 6 ft. cable available in satin nickel & oil-rubbed bronze finishes

LED driver hidden in canopy

Unique light engine directs light for greatest down lighting impact as well as optimal lighting of the glass

Sleek, adjustable, low voltage suspension cable is safe to the touch

Hand-blown decorative glass

Prismatic reflector increases surface light output

35,000 hour long life replaceable LEDs

Designed for both accent and task lighting applications

Hand-blown glass

35,000 hour L70 life rating on LEDs


Includes (5) 1.3 watt replaceable LED lamps

Low voltage operation

Suspends from thin 6 ft. coaxial cable

2345 N. Ernie Krueger Circle  
Waukegan, IL. 60087  
(847) 249-5970  
americanfluorescent.com

**American Fluorescent**  
design, efficiency, technology

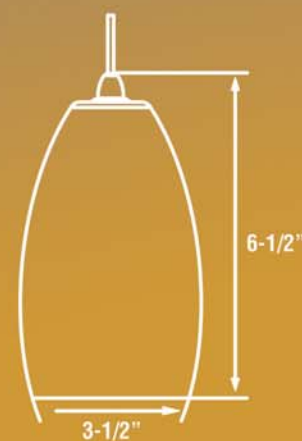

Glass LED monopoint  
(5) 1.3 watt replaceable LEDs  
L70 life rating-35,000 hours  
120V 60Hz  
Electronic LED driver  
Direct wire




Glass LED monopoint  
(5) 1.3 watt replaceable LEDs  
L70 life rating-35,000 hours  
120V 60Hz  
Electronic LED driver  
Direct wire

MODEL NO.	GLASS	FINISH	DIMENSIONS	
			W	H
BEPL	WH	SN	3 1/2"	6 1/2"
	AM amber	RB rubbed bronze		
	BU blue	SN satin nickel		
	RD red			
	WH white			

MODEL NO.	GLASS	FINISH	DIMENSIONS	
			W	H
LAPL	WH	SN	4 1/2"	7"
	AM amber	RB rubbed bronze		
	BU blue	SN satin nickel		
	GN green			
	WH white			

**American Fluorescent**  
design, efficiency, technology

# GEO

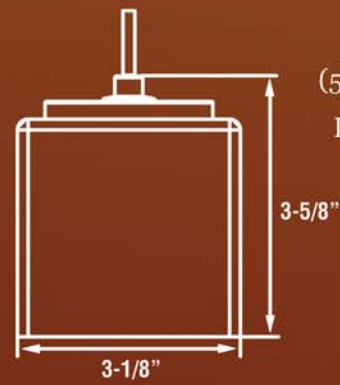


Glass LED monopoint  
 (5) 1.3 watt replaceable LEDs  
 L70 life rating-35,000 hours  
 120V 60Hz  
 Electronic LED driver  
 Direct wire

# KENWOOD




Glass LED monopoint  
 (5) 1.3 watt replaceable LEDs  
 L70 life rating-35,000 hours  
 120V 60Hz  
 Electronic LED driver  
 Direct wire

# ESSEX

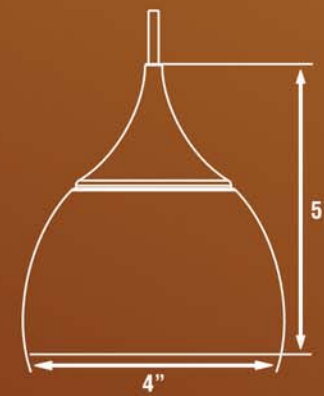

Glass LED monopoint  
 (5) 1.3 watt replaceable LEDs  
 L70 life rating-35,000 hours  
 120V 60Hz  
 Electronic LED driver  
 Direct wire

# ESTATE

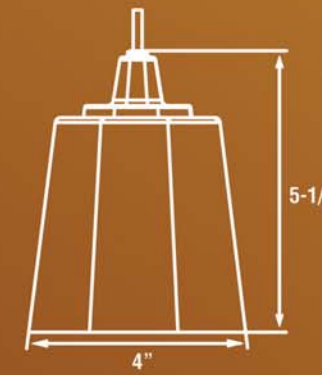

Glass LED monopoint  
 (5) 1.3 watt replaceable LEDs  
 L70 life rating-35,000 hours  
 120V 60Hz  
 Electronic LED driver  
 Direct wire

MODEL NO.	GLASS	FINISH	DIMENSIONS	
	WH	SN	W	H
GEPL	AM amber	RB rubbed bronze	3 1/8"	3 5/8"
	BU blue	SN satin nickel		
	WH white			

MODEL NO.	GLASS	FINISH	DIMENSIONS	
	WH	SN	W	H
KEPL	AM amber	RB rubbed bronze	3 1/2"	6"
	AS amber stone	SN satin nickel		
	GN green			
	WH white			

MODEL NO.	GLASS	FINISH	DIMENSIONS	
	WH	SN	W	H
SXPL	AM amber	RB rubbed bronze	4"	5"
	BU blue	SN satin nickel		
	RD red			
	WH white			

MODEL NO.	GLASS	FINISH	DIMENSIONS	
	WH	SN	W	H
ATPL	AM amber	RB rubbed bronze	4"	5 1/4"
	WH white	SN satin nickel		