

**Contemporary Wall Bracket
AD217/220/232**

| | | |
|-------------------|------------|----------------------|
| Project _____ | | Fixture Type _____ |
| Location _____ | | Quantity _____ |
| Approved By _____ | Date _____ | Catalog Number _____ |

Features

Economy 2-light T8 wall bracket is a good solution for utility applications. Product includes chrom end caps, bright aluminum body, grounded convenience outlet and rotary turn switch located in the right end cap. Diffuser is extruded white acrylic with ribbed linear prism. Tools are not required for lamp replacement. Fixture can be mounted horizontally and power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.

Construction

The housing is die formed from 22-gauge aluminum and is provided with standard mounting holes and wiring access. Ends are die-formed 20-gauge steel.

Finish

Housing is finished in bright anodized aluminum. Ends are polished chrome finish.

Diffuser

Diffuser is .100" extruded white acrylic with ribbed linear prisms located on the outside. Diffuser is retained by the end caps secured by two acorn nuts.

Electrical

This unit is wired with UL listed electronic high power factor instant start ballast for two T8 lamps at 120V 60 Hz AC operation.

Lamping

For use with 2 T8 linear fluorescent lamps; supplied by others.

Certification


All fixtures are cULus listed for damp locations.

Options (consult factory)

Without convenience outlet
Without rotary switch

For photometric information, consult factory.

Specifications and dimensions
subject to change without notice.

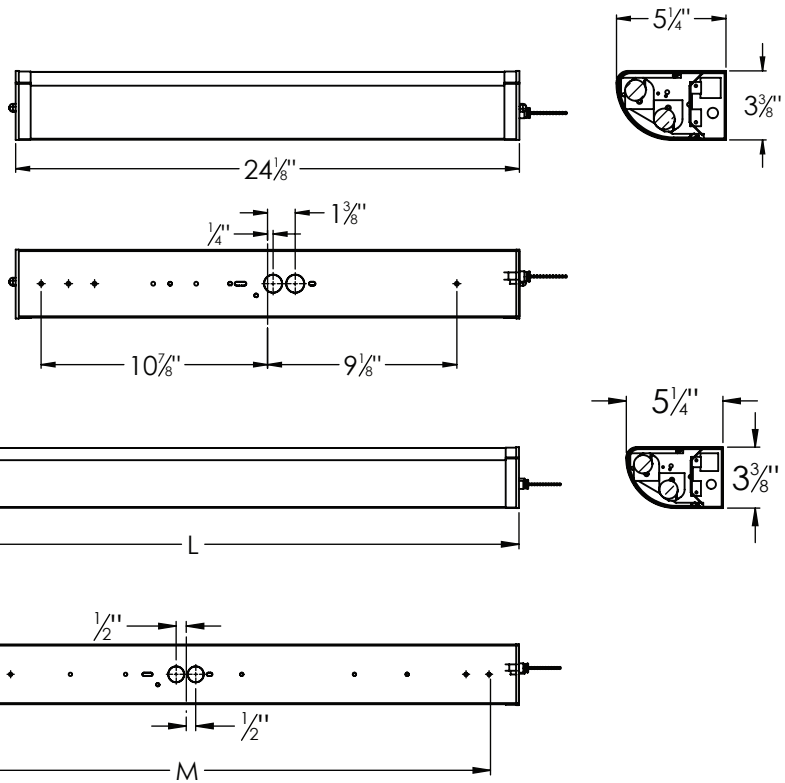

Ordering Information:

| Model No. | | Lamps | | Dimensions | | | Mounting |
|-----------------|---------|-------|-------|------------|---------|--------|----------|
| Finish | 120V | Qty | Lamp | H | L | D | M |
| Bright Aluminum | AD217E8 | 2 | F17T8 | 3-3/8" | 24-1/8" | 5-1/4" | - |
| Bright Aluminum | AD225E8 | 2 | F25T8 | 3-3/8" | 36-1/8" | 5-1/4" | 33" |
| Bright Aluminum | AD232E8 | 2 | F32T8 | 3-3/8" | 48-1/8" | 5-1/4" | 45" |