

## DESCRIPTION

These miniature lamp strip lights are designed to be used when mounting space is restricted. Choose from five different sizes. Models MS104, MS106, & MS108 use T5 lamps, while Models MS115 and MS215 use T8 lamps.

## CONSTRUCTION

Housing die formed of 21 gauge cold rolled steel and cover die formed of 24 gauge cold rolled steel. Optional asymmetric reflectors also die formed of 24 gauge cold rolled steel. Dual keyhole shaped mounting holes and standard wiring knockouts are included in housing. Can be individually mounted or in continuous runs.

## FINISH

Interior and exterior are finished in lighting grade white baked gloss enamel paint.

## DIFFUSER


There is no diffuser for these fixtures. The fluorescent lamps are exposed.

## ELECTRICAL


All units are wired with U.L. listed normal power factor, pre-heat ballasts (with starters), for 120 volt, 60 hertz A.C. operation. Lampholders are rotating lock, mini bi-pin type. All fixtures are U.L. listed.

## OPTIONS

Asymmetric reflectors available for light control. See ordering information. Other voltages, listings, and ratings available on request (contact factory).

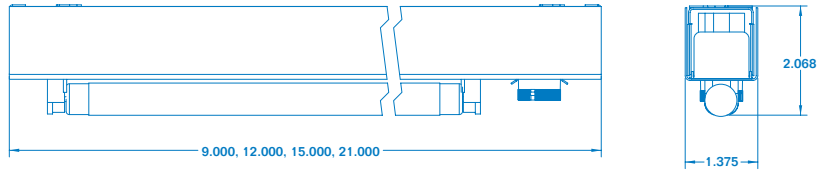

MS100 (1 Light)

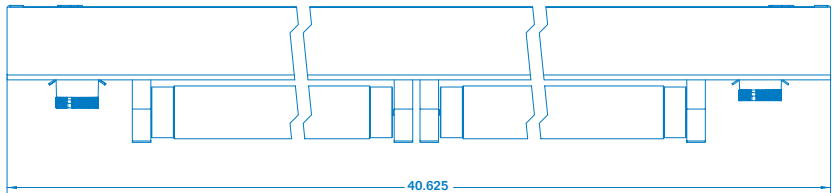

MS215

## ORDERING INFORMATION

Model No.		DIMENSIONS			
White	Fluorescent Lamps	L	W	D	Mtg. Ill.
MS104	(1) 4 watt T5	9"	1 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	1
MS106	(1) 6 watt T5	12"	1 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	2
MS108	(1) 8 watt T5	15"	1 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	3
MS115	(1) 15 watt T8	21"	1 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	4
MS215	(2) 15 watt (Tandem) T8	40 <sup>5</sup> / <sub>8</sub> "	1 <sup>3</sup> / <sub>8</sub> "	2 <sup>1</sup> / <sub>16</sub> "	5

### Accessories

Model No.	Description
MSR4	4 watt reflector
MSR6	6 watt reflector
MSR8	8 watt reflector
MSR15	15 watt reflector
MSR215	(2) 15 watt reflectors