

## DESCRIPTION

These white cloud fixtures have rounded corners and edges for a soft pillow appearance. Five different models to choose from including (2) 4-foot by 1-foot units, (2) 2-foot square units, and (1) 4-foot by 2-foot unit.

## CONSTRUCTION

Housing and cover are die formed of 22 gauge cold rolled steel, and corners are spot welded for rigidity. Standard mounting holes and standard wiring knockouts are included.

## FINISH

Housing interior is finished in lighting grade white baked gloss enamel paint. Exterior is available in white or black baked gloss enamel.

## DIFFUSER

Lens is made from a sheet of cast translucent white 100% virgin acrylic, .125" thick, formed into a reverse cloud puff shape with a stipple finish interior and a smooth finish exterior. Four steel clips on two edges of the diffuser allow it to lift and shift onto the housing lip.



## ELECTRICAL

All units with model numbers ending in ES are wired with U.L. listed high power factor, rapid start, Class P, energy saving (ES) full light output,  $\text{\textcircled{E}}$  ballasts, for 120 volt, 60 hertz A.C. operation.



All non-rapid start units have trigger start, normal power factor ballasts. Lampholders are rotating lock, medium bi-pin type. All fixtures are U.L. listed.

## OPTIONS



For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).





RC14 & CSW142





RC14 & CSW144



RC22 & CSW224



RC22 & CSW2U4

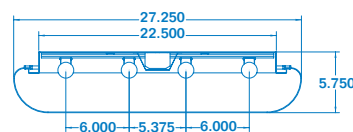

RC24 & CSW244

## ORDERING INFORMATION

Model No.	Fluorescent Lamps	DIMENSIONS			
		L	W	D	Mtg. Ill.
RC14 CSW142ES	(2) T12 48" Lamps	51½"	15"	5¾"	55
RC14 CSW144ES	(4) T12 48" Lamps	51½"	15"	5¾"	55
RC22 CSW224	(4) T12 24" Lamps	27"	27⅙"	5¾"	56
RC22 CSW2U4ES	(2) T12 6" U Lamps	27"	27½"	5¾"	56
RC24 CSW244ES	(4) T12 48" Lamps	51½"	27¼"	5¾"	57