

RCS SERIES

DESCRIPTION

These unique white cloud fixtures have a rounded stair step pattern along all four edges for a more contemporary appearance. Available in four sizes which use (2) 48" lamps, (4) 24" lamps (2) 6" U lamps, or (4) 48" lamps.

CONSTRUCTION



Housing, cover and ends are die formed of 22 gauge cold rolled steel. Standard mounting holes and standard wiring knockouts are included, with an extra 2" diameter center knockout on the back for wiring entry.

FINISH


Housing interior and exterior are finished in lighting grade white baked gloss enamel paint.

DIFFUSER



Lens is made from a sheet of cast translucent white 100% virgin acrylic, .125" thick, formed into a reverse cloud step puff shape with a stipple finish interior and a smooth finish exterior. Four steel clips on two edges of the diffuser allow it to lift and shift onto the housing lip.

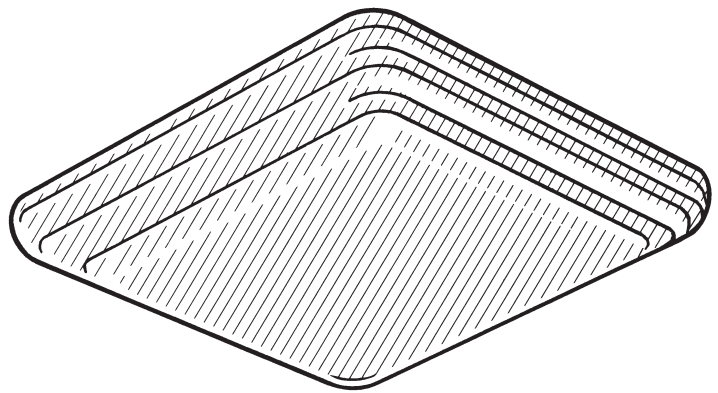

RCS240

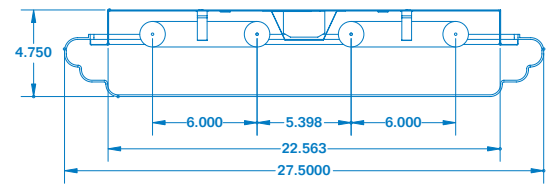


RCS2U4

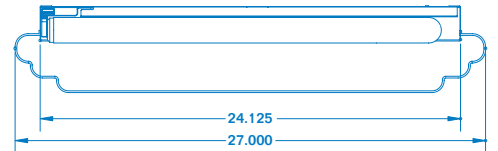


ELECTRICAL

All units with model numbers ending in ES are wired with U.L. listed high power factor, rapid start, Class P, energy saving (ES) full light output. E ballasts, for 120 volt, 60 hertz A.C. operation.



All non-ES units have trigger start normal power factor ballast. Lampholders are rotating lock, medium bi-pin type. All fixtures are U.L. listed.

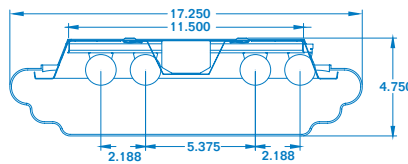

RCS420

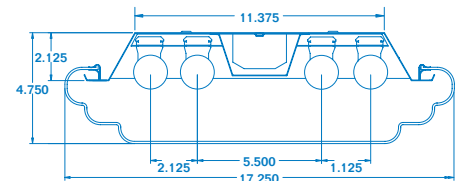

RCS440



OPTIONS

For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).

ORDERING INFORMATION

Model No.	Fluorescent Lamps	DIMENSIONS			Mtg. Ill.
		L	W	D	
RCS240ES	(2) T12 48" Lamps	52 ³ / ₄ "	11"	4 ³ / ₄ "	31
RCS2U4ES	(2) T12 6" U Lamps	27"	27 ¹ / ₂ "	4 ³ / ₄ "	56
RCS420	(4) T12 24" Lamps	29 ¹ / ₄ "	17 ¹ / ₄ "	4 ³ / ₄ "	25
RCS440ES	(4) T12 48" Lamps	52 ² / ₃₂ "	17 ¹ / ₄ "	4 ³ / ₄ "	27