


S SERIES

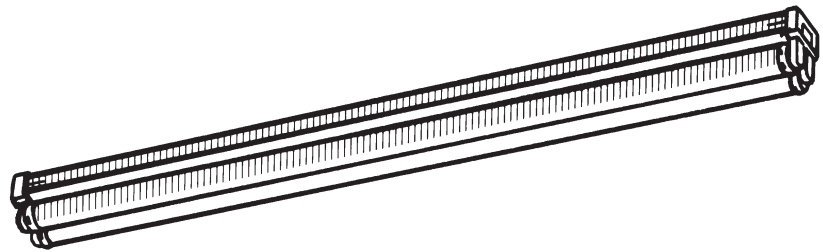

DESCRIPTION

This series of commercial grade strip lights is available in one lamp or two lamp configurations, and you can choose from three different lengths, 48", 72" or 96". They use 430 milliamp slimline T12 lamps.

CONSTRUCTION

Housing, cover and ends are die formed of 22 gauge cold rolled steel. Standard mounting holes and wiring knockouts are included. Can be stem, chain, or direct mounted, and can be hung individually or in continuous runs.

FINISH

Housing interior and exterior are finished in lighting grade white baked gloss enamel paint.

DIFFUSER


There is no diffuser for these fixtures. The fluorescent lamps are exposed.

ELECTRICAL


All "slimline" units are wired with U.L. listed high power factor, instant start, Class P ballasts for 120 volt, 60 hertz A.C. operation. These ballasts are sound rated C and are for use with T12 single pin nominal 430 M.A. slimline lamps only. Minimum starting temperature for ES lamps is 60°F. Lampholders are compression lock, single pin type. All fixtures are U.L. listed.

OPTIONS


Symmetric and asymmetric reflectors are available (contact factory). For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).

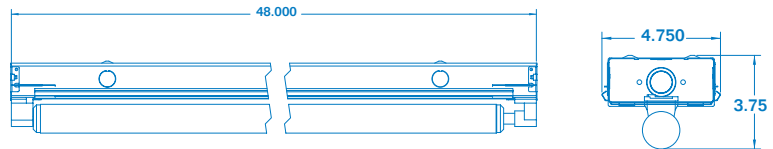

S148, 248

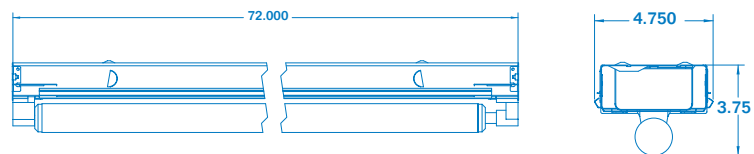

S172, 272

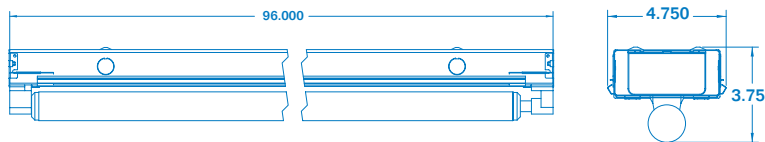

S196, 296

ORDERING INFORMATION

Model No.	430 MA - Slimline Fluorescent Lamps	DIMENSIONS			
		L	W	D	Mtg. Ill.
S148	(1) T12 48"	48"	4 ³ / ₄ "	3 ³ / ₄ "	39
S172	(1) T12 72"	72"	4 ³ / ₄ "	3 ³ / ₄ "	41
S196	(1) T12 96"	96"	4 ³ / ₄ "	3 ³ / ₄ "	42
S248	(2) T12 48"	48"	4 ³ / ₄ "	3 ³ / ₄ "	39
S272	(2) T12 72"	72"	4 ³ / ₄ "	3 ³ / ₄ "	41
S296ES	(2) T12 96"	96"	4 ³ / ₄ "	3 ³ / ₄ "	42