

VP SERIES

DESCRIPTION

Choose from three models of vaportight lights, featuring a low maintenance glass cylinder to keep moisture and dirt away from light socket. All are suitable for barns, garages, sheds, workshops, livestock buildings and more. VP140 features steel cover which mounts to junction box. VP141 features same steel cover and a removable wire guard. VP144 features a steel cover which attaches to a 1/2" pipe for wall or ceiling mounting. All models use incandescent bulb up to 100 watts maximum.

CONSTRUCTION

Housing cap is die cast aluminum. Mounting cover is die formed from cold rolled steel.

FINISH

No finish required.

DIFFUSER

Globe is made from tempered clear glass in a bullet shape. Globe is threaded and screws directly into the housing cap.


ELECTRICAL

All "INCANDESCENT" fixtures are wired with U.L. listed medium base porcelain lampholders for 120 volt 60 hertz A.C. operation. Maximum wattage is A19 lamps-100 watts max. Power supply connections must be made inside a junction box (sold separately). VP144-6 accepts 1/2" pipe for mounting.

All fixtures are U.L. listed for damp locations.

OPTIONS




None

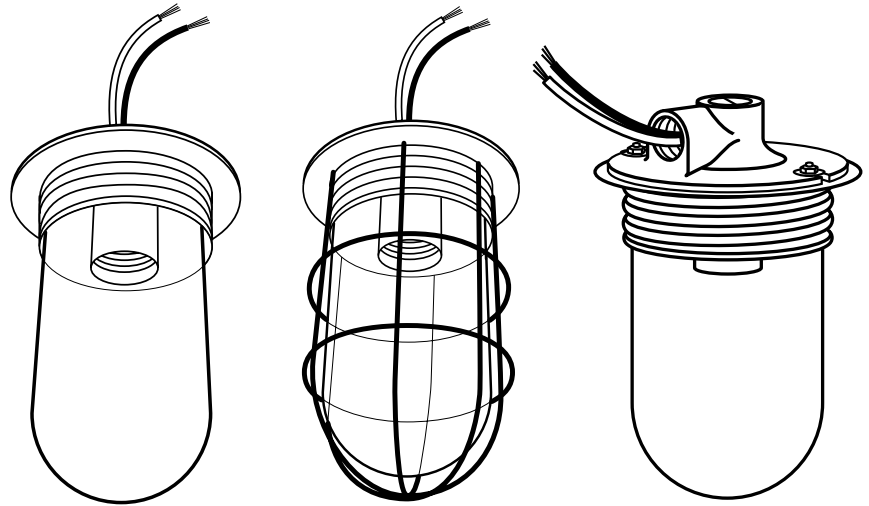

VP140

VP141

VP144

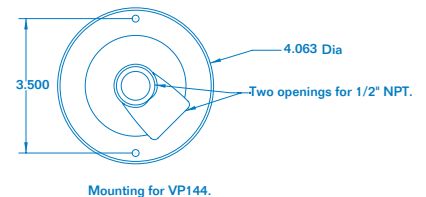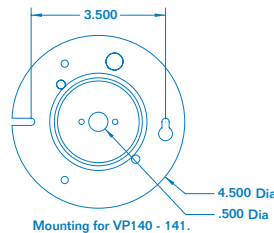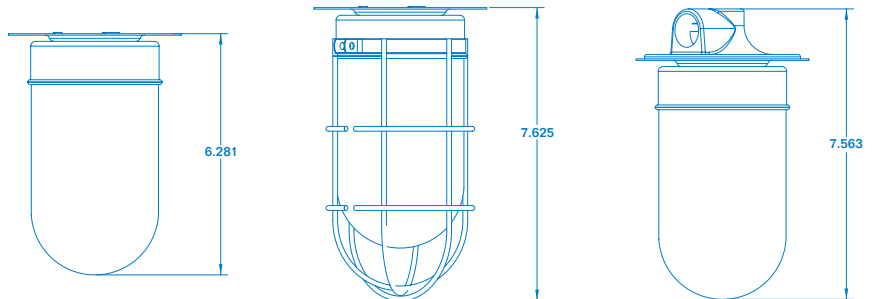

ORDERING INFORMATION

Model No.	Incandescent Lamps	DIMENSIONS	
		Diameter	Depth
VP140-6*	(1) 100 watts Maximum	4 1/2"	6 3/32"
VP141-6*	(1) 100 watts Maximum	4 1/2"	7 5/8"
VP144-6*	(1) 100 watts Maximum	4 1/2"	7 9/16"

* Order in multiples of six.