


# SM SERIES

## DESCRIPTION

This series of strip lights is designed to mount one lamp on the side of the channel. The series is available in 24", 36" and 48" lengths. All units use T8 lamps.

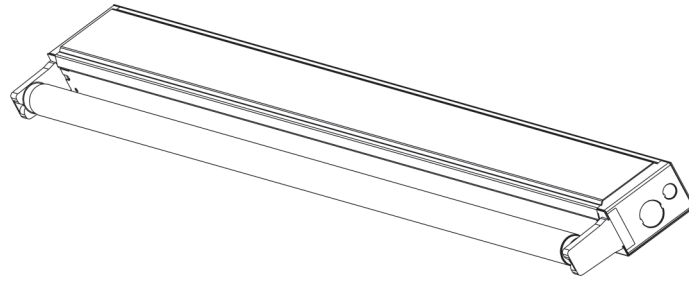

## CONSTRUCTION

Housing, cover and ends are die formed of 22 gauge cold rolled steel. Standard mounting holes and wiring knockouts are included. Can be stem, chain, or direct mounted; and can be hung individually or in continuous runs.

## FINISH



Housing interior and exterior are finished in lighting grade white baked gloss enamel paint.

## DIFFUSER

There is no diffuser for these fixtures. The fluorescent lamps are exposed.

## ELECTRICAL

All units are wired with U.L. listed high power factor, instant start, Class P, ballasts for 120 volt 60 hertz A.C. operation, 0 degree start. Lampholders are rotating lock, medium bi-pin type. All fixtures are U.L. listed for damp location.

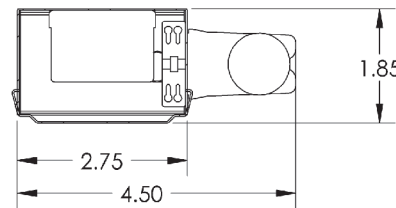

SM100 Series (1 Light)



## ORDERING INFORMATION

| Model No. | Fluorescent Lamps | DIMENSIONS |                                 |                                 |           |
|-----------|-------------------|------------|---------------------------------|---------------------------------|-----------|
|           |                   | L          | W                               | D                               | Mtg. Ill. |
| SM120RSE8 | (1) F17T8 24"     | 24"        | 4 <sup>5</sup> / <sub>8</sub> " | 1 <sup>7</sup> / <sub>8</sub> " | 128       |
| SM130RSE8 | (1) F25T8 36"     | 36"        | 4 <sup>5</sup> / <sub>8</sub> " | 1 <sup>7</sup> / <sub>8</sub> " | 128       |
| SM140RSE8 | (1) F32T8 48"     | 48"        | 4 <sup>5</sup> / <sub>8</sub> " | 1 <sup>7</sup> / <sub>8</sub> " | 128       |