

DESCRIPTION

These rounded profile wall brackets have a curved, ribbed acrylic diffuser, and are available in two color options, chrome housing and ends, or white housing and chrome ends. They are fully enclosed, can be mounted vertically or horizontally, and every unit comes with a grounded convenience outlet and turn switch unless otherwise specified. Choose from four different sizes measuring approximately 18", 24", 36", or 48" in length. All models use (1) T12 lamp.

CONSTRUCTION

Housing die formed of 21 gauge steel, cover die formed of 24 gauge steel, and ends are die formed of 20 gauge cold rolled steel. Ends are secured with acorn nuts, so no tools are needed to change lamps. Standard mounting holes and standard wiring knockouts are included.

FINISH

Interior is finished in lighting grade white baked gloss enamel paint. Exterior is finished in chrome plating, or in lighting grade white baked gloss enamel paint.

DIFFUSER




The one-piece lens is extruded of 100% virgin clear acrylic, with a linear ribbed prism pattern on the outside surface. Thickness is .100". Lens is held in place by the end caps.

ELECTRICAL

All units are wired with U.L. listed normal power factor or high power factor, rapid start, Class P ballasts as specified, for 120 volt, 60 hertz A.C. operation. All non RS units have preheat ballast. All ES units have energy saving, full light output (E) ballasts. Three wire grounded convenience outlet and turn switch are standard and located in the right end cap. Lampholders are rotating lock, medium bi-pin type. All fixtures are U.L. listed for damp location.

OPTIONS

See ordering chart for all-chrome, or white and chrome finish. Fixture is standard with a grounded convenience outlet and turn switch, contact factory for other configurations. For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).

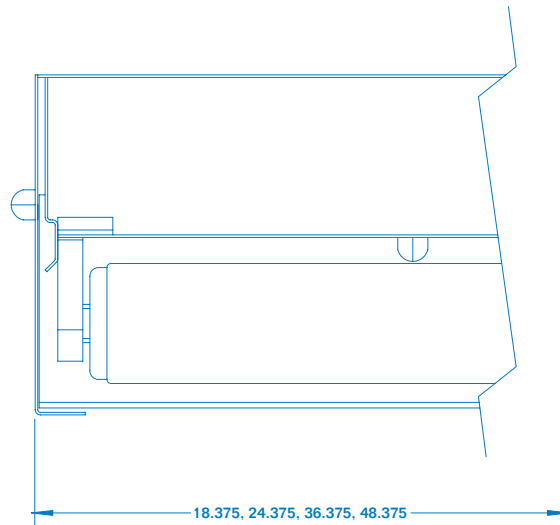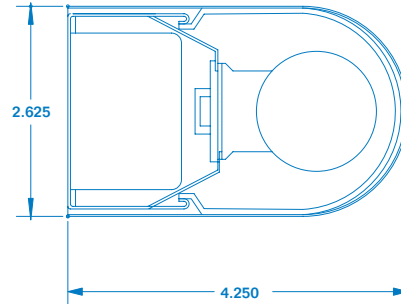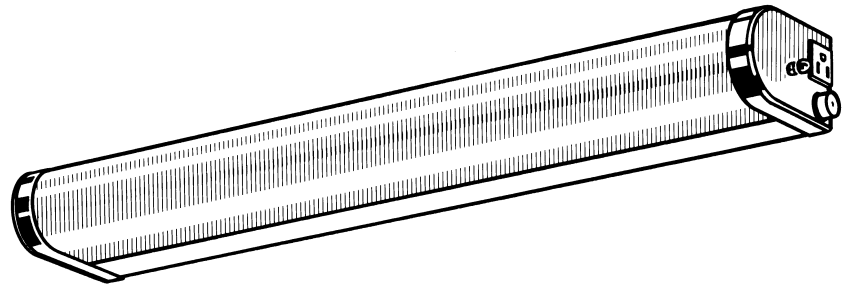

ORDERING INFORMATION

Model No.			DIMENSIONS			
All Chrome	White/ Chrome Ends	Fluorescent Lamps	L	W	D	Mtg. Ill.
ASP115	N/A	(1) T12 18" PH Lamp	18 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106
ASP115RS	ASWC115RS	(1) T12 18" Lamp	18 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106
ASP120	N/A	(1) T12 24" PH Lamp	24 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106
ASP120RS	ASWC120RS	(1) T12 24" Lamp	24 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106
ASP130RS	ASWC130RS	(1) T12 36" Lamp	36 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106
ASP140RSES	ASWC140RSES	(1) T12 48" Lamp	48 $\frac{3}{8}$ "	2 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	106