

## DESCRIPTION

This economical series of undercabinet lights features a rocker on/off switch and grounded convenience outlet unless otherwise specified. Available in two finishes, white and oak wood grain. Four lengths to choose from, 18", 24", 36", and 48". All models use T12 lamps.

## CONSTRUCTION

Housing die formed of 21 gauge steel, cover die formed of 24 gauge steel. Standard mounting holes and standard wiring knockouts are included. Can be mounted individually or in continuous runs.

## FINISH

Interior is finished in lighting grade white baked gloss enamel paint. Exterior is finished in lighting grade white baked gloss enamel paint, or a hot stamped oak woodgrain finish.

## DIFFUSER




The one-piece lens is extruded of translucent white 100% virgin acrylic, with a linear ribbed prism pattern on the outside surface. Thickness is .080". Lens snaps into the housing.

## ELECTRICAL



Most units are wired with U.L. listed, normal power factor, trigger start ballasts for 120 volt, 60 hertz A.C. operation. These exceptions should be noted: Model numbers ending in PH indicate a U.L. listed, normal power factor, preheat ballast for 120 volt, 60 hertz A.C. operation. Model numbers ending in ES indicate a U.L. listed high power factor, full light output, rapid start, energy saving ballast for 120 volt, 60 hertz A.C. operation. Lampholders are rotating lock, mini or medium bi-pin type, as appropriate. All fixtures are U.L. listed.

## OPTIONS

Hot stamped walnut wood grain finish also available (contact factory). Fixture is standard with a convenience outlet and rocker switch, contact factory for other configurations such as lamp included (T), 6 foot grounded cord and plug included (X015), Less convenience outlet and switch (X001). For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).

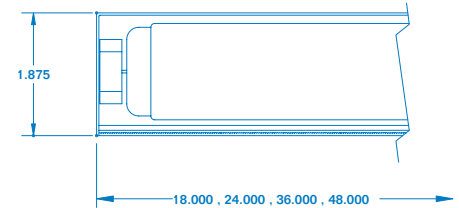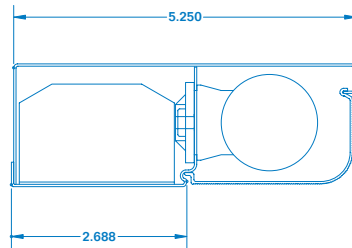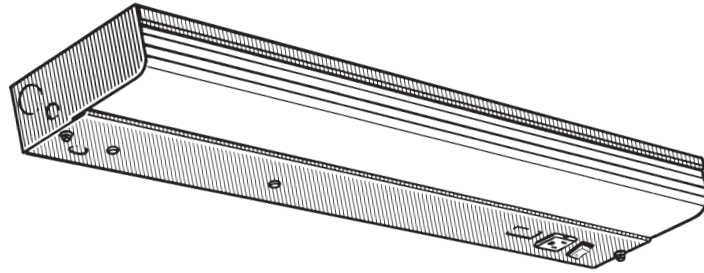

TUQ 100 Series (1 Light)

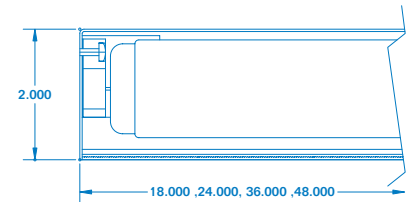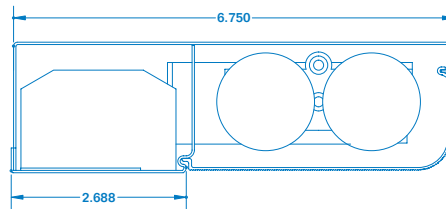

TUQ 200 Series (2 Lights)

## ORDERING INFORMATION

Model No.			DIMENSIONS			
White	Oak	Fluorescent Lamps	L	W	D	Mtg. Ill.
TUQ115WPH	TUQ115KPH	(1) 15 watt 18" T12 PH Lamp	18"	5 1/4"	1 1/8"	6
TUQ115W	TUQ115K	(1) 15 watt 18" T12 Lamp	18"	5 1/4"	1 1/8"	6
TUQ120WPH	TUQ120KPH	(1) 20 watt 24" T12 PH Lamp	24"	5 1/4"	1 1/8"	7
TUQ120W	TUQ120K	(1) 20 watt 24" T12 Lamp	24"	5 1/4"	1 1/8"	7
TUQ130W	TUQ130K	(1) 30 watt 36" T12 Lamp	36"	5 1/4"	1 1/8"	8
TUQ140W	TUQ140K	(1) 40 watt 48" T12 Lamp	48"	5 1/4"	1 1/8"	9
TUQ215	N/A	(2) 15 watt 18" T12 Lamps	18"	6 3/4"	2"	10
TUQ220	N/A	(2) 20 watt 24" T12 Lamps	24"	6 3/4"	2"	11
TUQ230	N/A	(2) 30 watt 36" T12 Lamps	36"	6 3/4"	2"	12
TUQ240ES	N/A	(2) 40 watt 48" T12 Lamps	48"	6 3/4"	2"	13