

DESCRIPTION

This is a 18" fluorescent closet light which comes with a 15 watt T8 lamp and an on/off pull chain. Specially designed for universal J-box mounting. Meets National Electrical Codes for closet lighting.

CONSTRUCTION

Housing die formed of 21 gauge steel, cover die formed of 24 gauge steel. Unique universal mounting hole pattern on back allows for quick J-box mounting. Standard wiring knockouts are included on back and ends. Can be mounted individually or in continuous runs.

FINISH

Interior is finished in lighting grade white baked gloss enamel paint. Exterior is finished in lighting grade white baked gloss enamel paint.

DIFFUSER



The one-piece lens is extruded of translucent white acrylic, with a linear ribbed prism pattern on the outside surface. Thickness is .055". Lens snaps into the housing.

ELECTRICAL

Unit is wired with U.L. listed normal power factor pre-heat ballast (with starters), for 120 volt, 60 hertz A.C. operation. Fixture comes completely wired with power leads exiting back of channel and special hole pattern for universal junction box mounting. A heavy-duty pull chain switch is installed in center of wireway cover. Unit is supplied with a 15 watt cool white preheat T8 lamp installed. Lampholders are rotating lock, medium bi-pin type. Fixture is U.L. listed and meets the National Electrical Code for closet lighting.

OPTIONS

For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).

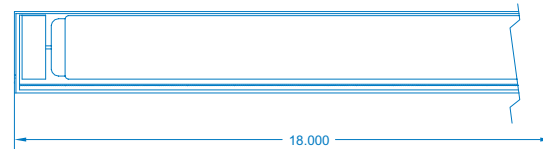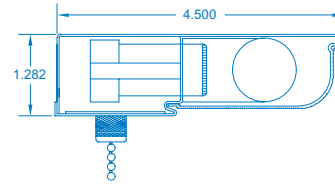

ORDERING INFORMATION

Model No.	Fluorescent Lamp	DIMENSIONS			Mtg. Ill.
		L	W	D	
VTU115CL-CB	(1) 18" 15 watt T8 lamp (included)	18"	4 ¹ / ₂ "	1 ⁹ / ₃₂ "	93