


WTA/WTK SERIES

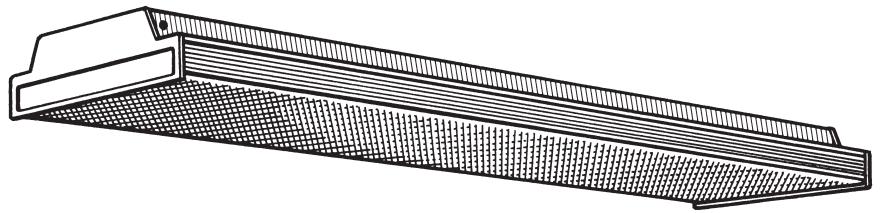

DESCRIPTION

These wrap fixtures are assembled on full-sized housings. WTK models featuring solid wood ends are also available. Choose a two lamp or four lamp model in 24" or 48" lengths, or choose a four lamp or eight lamp model in 96" length. All fixtures use T12 lamps.

CONSTRUCTION

Housing and cover are die formed of 22 gauge cold rolled steel. Ends are die formed from 22 gauge steel (WTA) or are cut from solid oak and are screwed to housing (WTK). Standard mounting holes and standard wiring knockouts are included, with an extra 2" diameter center knockout on the back for wiring entry. Can be stem, chain, or direct mounted. WTA models can be hung individually or in continuous runs.

FINISH

Housing interior and exterior are finished in lighting grade white baked gloss enamel paint. Wood ends on WTK models are stained in a medium oak finish.

DIFFUSER


Lens is a one-piece extruded lens of clear 100% virgin acrylic, .090" thick, with a diamond prismatic pattern on the face and a linear ribbed prism pattern on the sides. The lens lifts and shifts onto the housing and hangs from a lip running the entire length of both sides of the housing.

ELECTRICAL



All ES units are wired with U.L. listed high power factor, rapid start, Class P, energy saving (ES), full light output (E) ballasts, for 120 volt, 60 hertz A.C. operation. All non-ES units have trigger start normal power factor ballast. Lampholders are rotating lock, medium bi-pin type. All fixtures are U.L. listed.

OPTIONS



96" units also available (contact factory). Alternate smooth diffuser available (contact factory). For ballast upgrades and options, refer to back of guide. Other voltages, listings, and ratings available on request (contact factory).





WTA 200 Series (2 Lights)

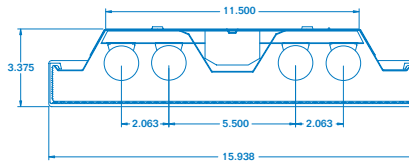


WTA 400 Series (4 Lights)



WTK200 Series (2 Lights)

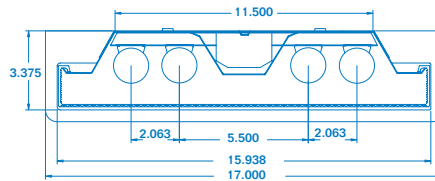

WTK400 Series (4 Lights)



ORDERING INFORMATION

Model No.	Fluorescent Lamps	DIMENSIONS			
		L	W	D	Mtg. Ill.
WTA220A	(2) T12 24"	24 ⁷ / ₈ "	11 ¹ / ₄ "	3 ³ / ₈ "	129
WTA420A	(4) T12 24"	24 ⁷ / ₈ "	15 ⁵ / ₁₆ "	3 ³ / ₈ "	25
WTA240AES	(2) T12 48"	48 ⁷ / ₈ "	11 ¹ / ₄ "	3 ³ / ₈ "	23
WTA440AES	(4) T12 48"	48 ⁷ / ₈ "	15 ⁵ / ₁₆ "	3 ³ / ₈ "	27
Solid Oak Ends					
WTK220A	(2) T12 24"	25 ³ / ₈ "	12 ³ / ₈ "	3 ⁷ / ₈ "	129
WTK420A	(4) T12 24"	25 ³ / ₈ "	17"	3 ⁷ / ₈ "	25
WTK240AES	(2) T12 48"	49 ³ / ₈ "	12 ³ / ₈ "	3 ⁷ / ₈ "	23
WTK440AES	(4) T12 48"	49 ³ / ₈ "	17"	3 ⁷ / ₈ "	27